


## Faraday's Law

# Ampere's law


- Magnetic field is produced by time variation of electric field

$$\int \mathbf{B} \cdot d\mathbf{s} = \mu_o (I + I_d) = \mu_o I + \mu_o \epsilon_o \frac{d\Phi_E}{dt}$$

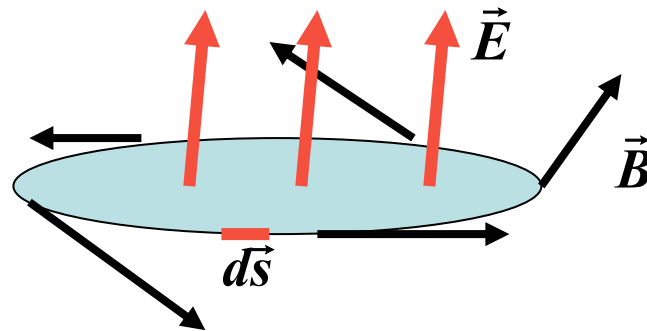


# Induction

- A loop of wire is connected to a sensitive ammeter
- When a magnet is moved toward the loop, the ammeter deflects

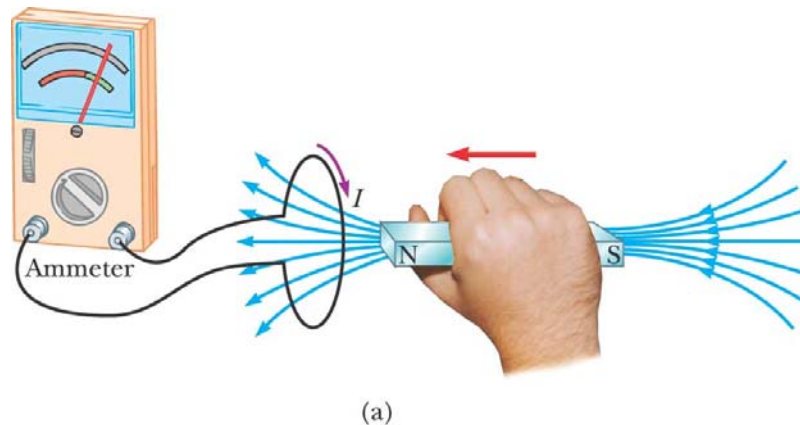

# Induction


- An **induced current** is produced by a changing magnetic field
- There is an **induced emf** associated with the induced current
- A current can be produced without a battery present in the circuit
- Faraday's law of induction describes the induced emf

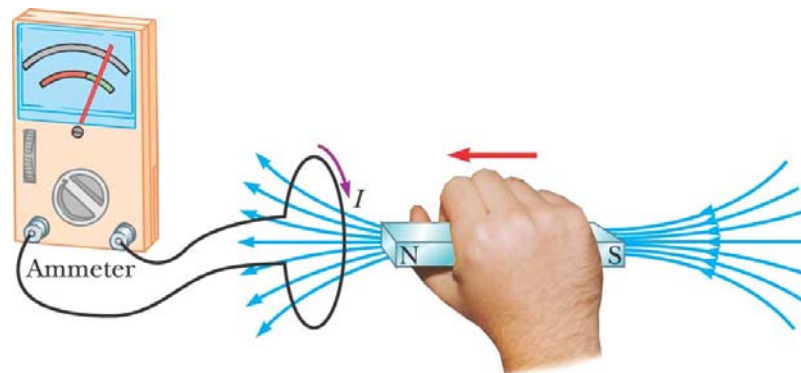

(a)

# Induction


- When the magnet is held stationary, there is no deflection of the ammeter
- Therefore, there is no induced current
  - Even though the magnet is in the loop

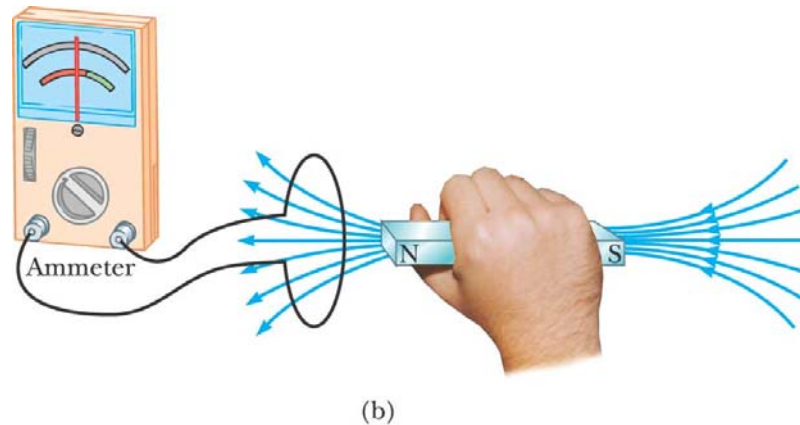

©2004 Thomson - Brooks/Cole

# Induction

- The magnet is moved away from the loop
- The ammeter deflects in the opposite direction

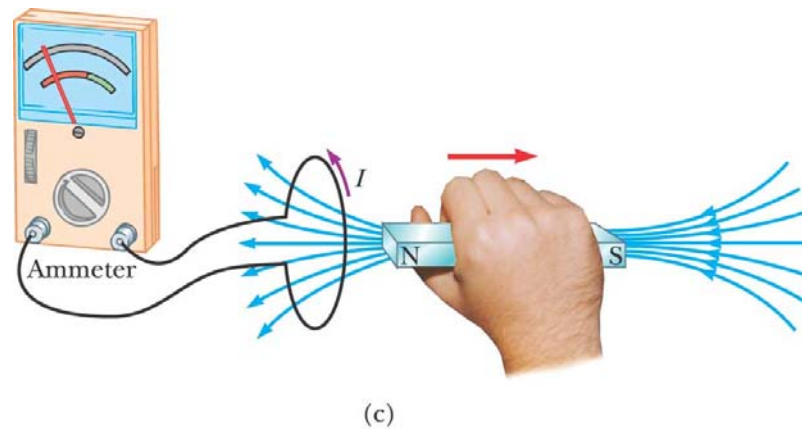

©2004 Thomson - Brooks/Cole


# Induction

- The ammeter deflects when the **magnet is moving toward or away from the loop**
- The ammeter also deflects when **the loop is moved toward or away from the magnet**
- Therefore, the loop detects that the magnet is moving relative to it
  - We relate this detection to a change in the magnetic field
  - This is the induced current that is produced by an **induced emf**

# Faraday's law

- Faraday's law of induction states that “the emf induced in a circuit is directly proportional to the time rate of change of the magnetic flux through the circuit”
- Mathematically,

$$\mathcal{E} = -\frac{d\Phi_B}{dt}$$

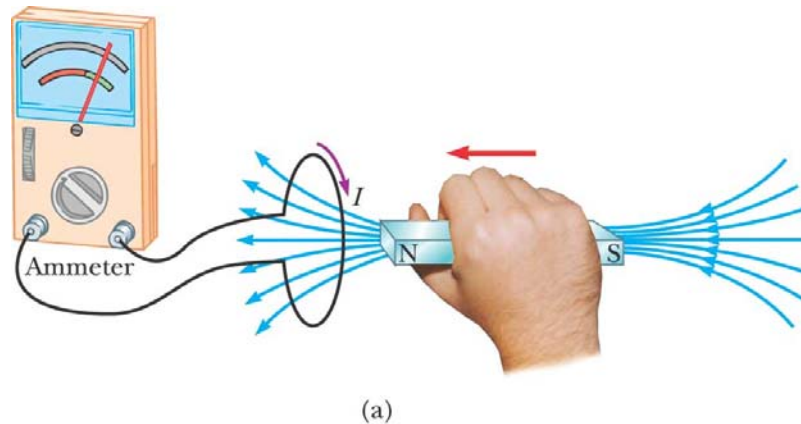




# Faraday's law

- Assume a loop enclosing an area  $A$  lies in a uniform magnetic field  $\mathbf{B}$
- The magnetic flux through the loop is  $\Phi_B = BA \cos \theta$
- The induced emf is

$$\varepsilon = -\frac{d(BA \cos \theta)}{dt}$$

- **Ways of inducing emf:**


- The magnitude of  $\mathbf{B}$  can change with time
- The area  $\mathbf{A}$  enclosed by the loop can change with time
- The angle  $\theta$  can change with time
- Any combination of the above can occur

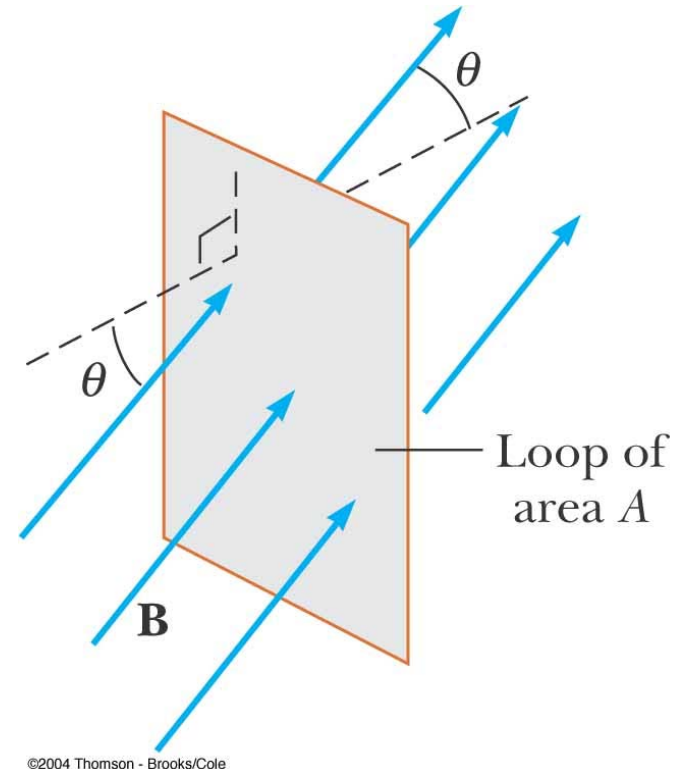

©2004 Thomson - Brooks/Cole

# Motional emf

- A **motional emf** is one induced in a conductor moving through a constant magnetic field
- The electrons in the conductor experience a force,  $\mathbf{F}_B = q\mathbf{v} \times \mathbf{B}$  that is directed along  $\ell$

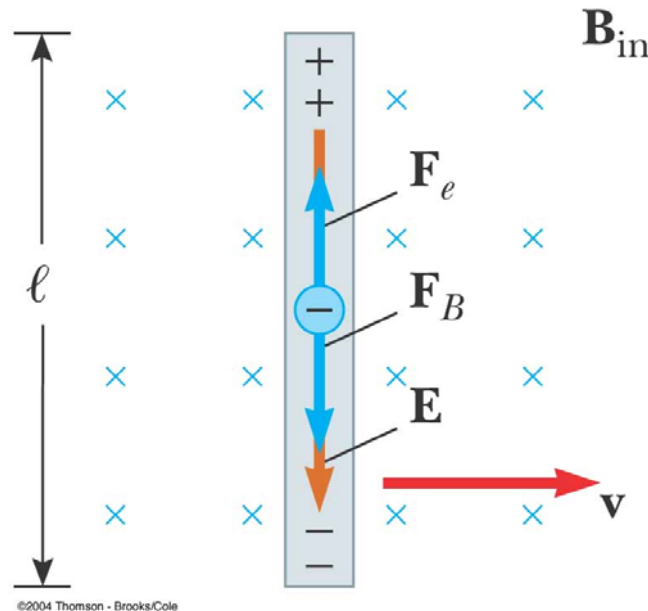


# Motional emf

$$\mathbf{F}_B = q\mathbf{v} \times \mathbf{B}$$

- Under the influence of the force, the electrons move to the lower end of the conductor and accumulate there
- As a result, an electric field  $\mathbf{E}$  is produced inside the conductor
- The charges accumulate at both ends of the conductor until they are in equilibrium with regard to the electric and magnetic forces


$$qE = qvB \quad \text{or} \quad E = vB$$

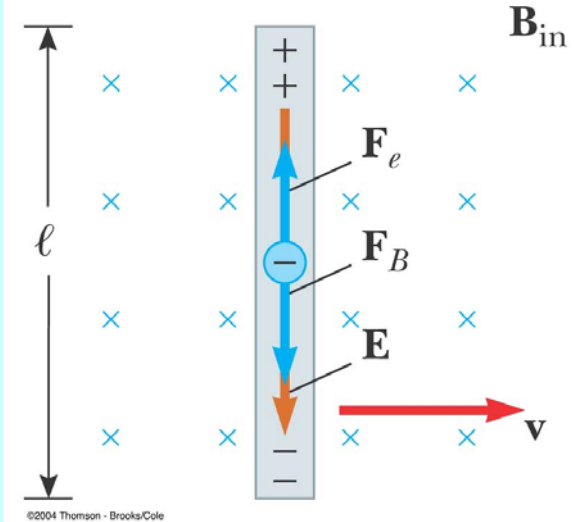


# Motional emf

$$E = vB$$

- A potential difference is maintained between the ends of the conductor as long as the conductor continues to move through the uniform magnetic field
- If the direction of the motion is reversed, the polarity of the potential difference is also reversed

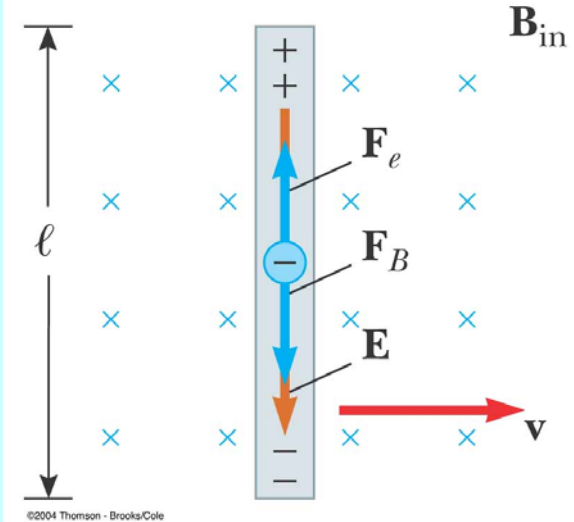


# Example: Sliding Conducting Bar

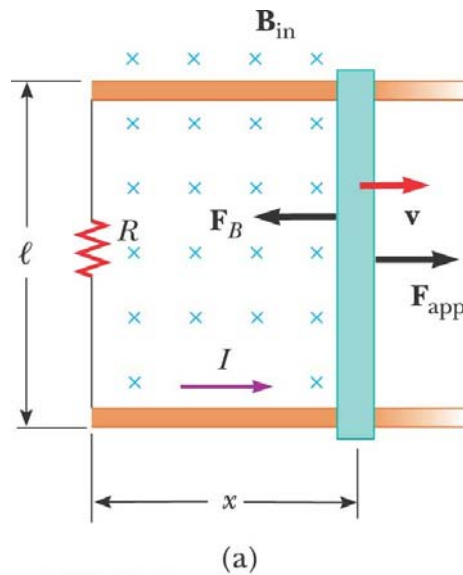

©2004 Thomson - Brooks/Cole


$$E = vB$$

$$\mathcal{E} = E\ell = B\ell v$$

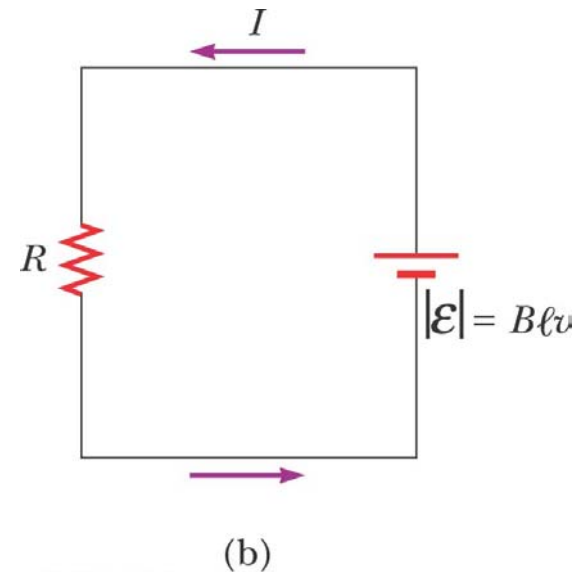


©2004 Thomson - Brooks/Cole

# Example: Sliding Conducting Bar

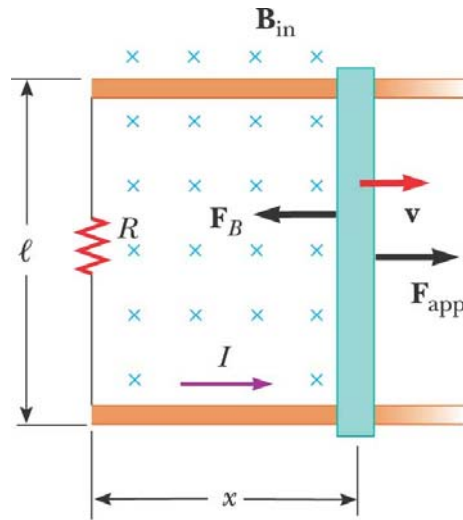

©2004 Thomson - Brooks/Cole

(a)

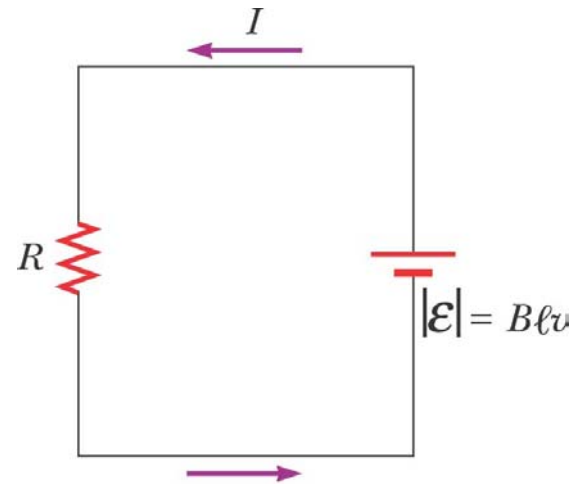

©2004 Thomson - Brooks/Cole

(b)

- The induced emf is

$$\mathcal{E} = -\frac{d\Phi_B}{dt} = -B\ell \frac{dx}{dt} = -B\ell v$$

$$I = \frac{|\mathcal{E}|}{R} = \frac{B\ell v}{R}$$

# Lenz's law

$$\varepsilon = -\frac{d\Phi_B}{dt}$$


- Faraday's law indicates that the induced emf and the change in flux have opposite algebraic signs
- This has a physical interpretation that has come to be known as **Lenz's law**
- **Lenz's law:** *the induced current in a loop is in the direction that creates a magnetic field that opposes the change in magnetic flux through the area enclosed by the loop*
- The induced current tends to keep the original magnetic flux through the circuit from changing

# Lenz's law


$$\varepsilon = -\frac{d\Phi_B}{dt}$$

- **Lenz's law:** *the induced current in a loop is in the direction that creates a magnetic field that opposes the change in magnetic flux through the area enclosed by the loop*
- The induced current tends to keep the original magnetic flux through the circuit from changing

**$B$**  is increasing with time

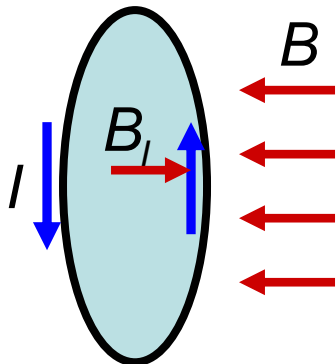


**$B$**  is decreasing with time

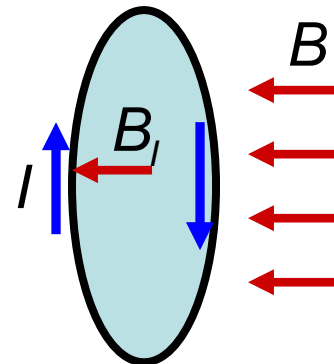




# Electric and Magnetic Fields

## Ampere-Maxwell law

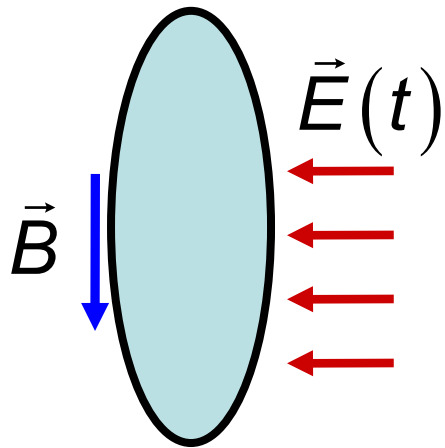

## Faraday's law

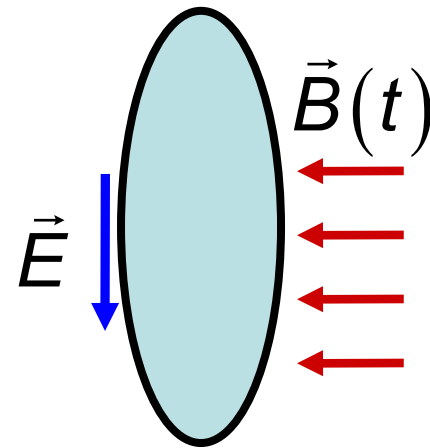


## Example 1

A long solenoid has  $n$  turns per meter and carries a current  $I = I_{\max} (1 - e^{-\alpha t})$ . Inside the solenoid and coaxial with it is a coil that has a radius  $R$  and consists of a total of  $N$  turns of fine wire. What emf is induced in the coil by the changing current?

$$B(t) = \mu_0 n I(t)$$

$$\Phi(t) = \pi R^2 N B(t) = \mu_0 \pi R^2 N n I(t)$$

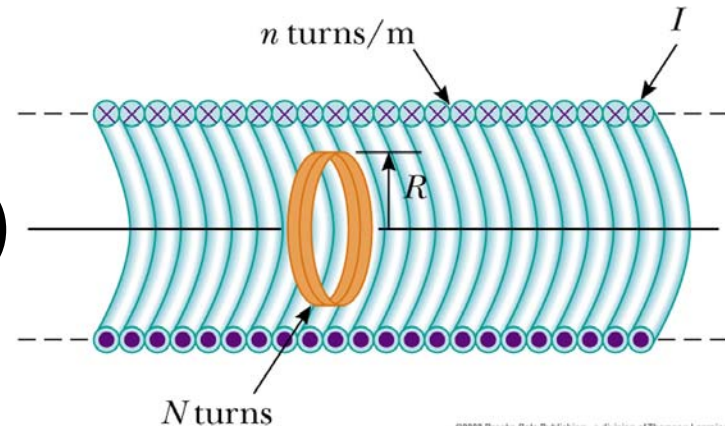

©2002 Brooks Cole Publishing - a division of Thomson Learning


$$\varepsilon = -\frac{d\Phi(t)}{dt} = -\mu_0 \pi R^2 N n \frac{dI(t)}{dt} = \mu_0 \pi R^2 N n \alpha I_{\max} e^{-\alpha t}$$

## Example 2

A single-turn, circular loop of radius  $R$  is coaxial with a long solenoid of radius  $r$  and length  $l$  and having  $N$  turns. The variable resistor is changed so that the solenoid current decreases linearly from  $I_1$  to  $I_2$  in an interval  $\Delta t$ . Find the induced emf in the loop.

$$B(t) = \mu_o \frac{N}{l} I(t)$$

$$\Phi(t) = \pi r^2 B(t) = \mu_o \pi r^2 \frac{N}{l} I(t)$$

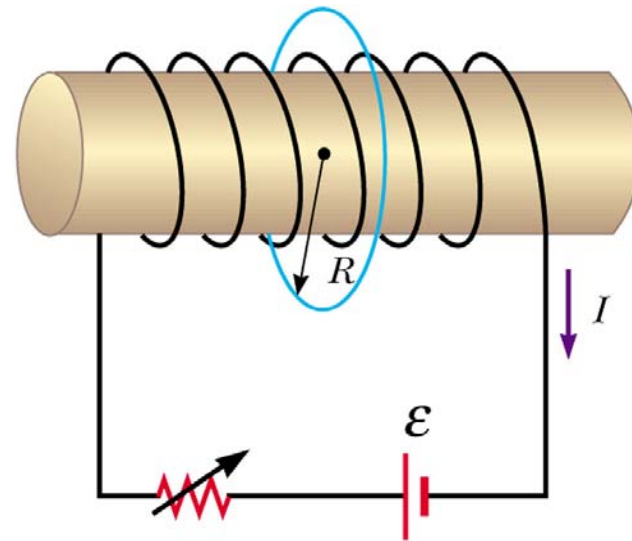

Variable  
resistor

©2002 Brooks Cole Publishing - a division of Thomson Learning

$$\varepsilon = -\frac{d\Phi(t)}{dt} = -\mu_o \pi r^2 \frac{N}{l} \frac{dI(t)}{dt} = -\mu_o \pi r^2 \frac{N}{l} \frac{I_2 - I_1}{\Delta t}$$

## Example 3


A square coil (20.0 cm × 20.0 cm) that consists of 100 turns of wire rotates about a vertical axis at 1 500 rev/min. The horizontal component of the Earth's magnetic field at the location of the coil is  $2.00 \times 10^{-5} \text{ T}$ . Calculate the maximum emf induced in the coil by this field.

$$\Phi = BA \cos \theta$$

$$\varepsilon = -\frac{d(BA \cos \theta)}{dt} \quad \theta = \omega t$$

$$\varepsilon = -BA \frac{d(\cos \omega t)}{dt} = BA\omega \sin \omega t$$



$$\varepsilon_{\text{max}} = BA\omega = 12.6 \text{ mV}$$

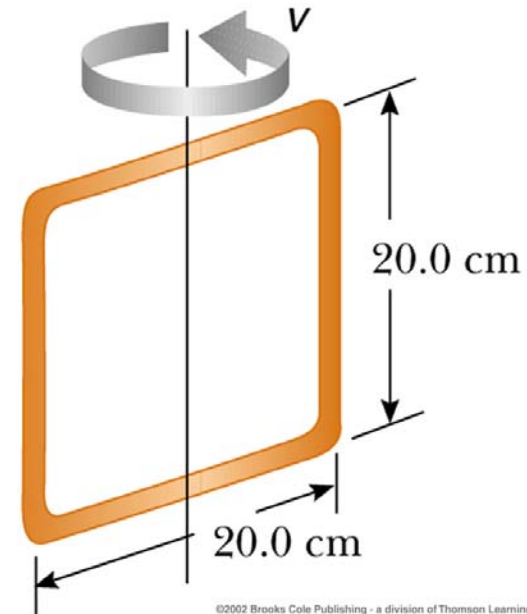

## Induction


# Self-Inductance

- When the switch is closed, the current does not immediately reach its maximum value
- Faraday's law can be used to describe the effect
- As the current increases with time, the magnetic flux through the circuit loop due to this current also increases with time
- This corresponding flux due to this current also increases
- This increasing flux creates an induced emf in the circuit

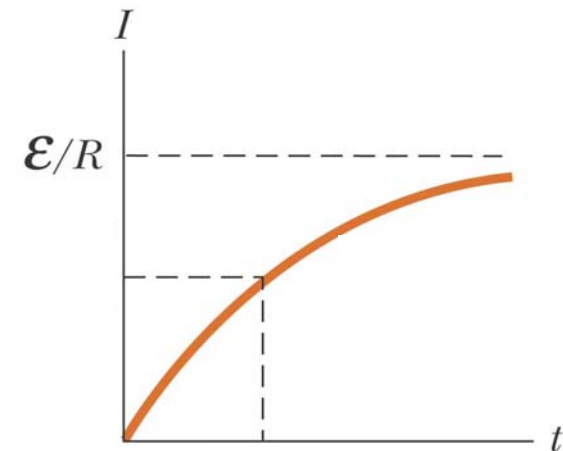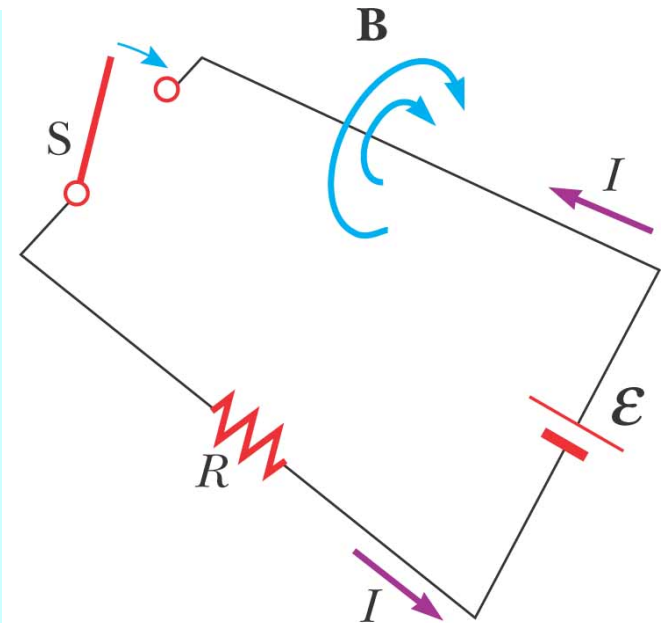


# Self-Inductance

- **Lenz Law:** The direction of the induced emf is such that it would cause an induced current in the loop which would establish a magnetic field opposing the change in the original magnetic field
- The direction of the induced emf is opposite the direction of the emf of the battery
- This results in a **gradual** increase in the current to its final equilibrium value
- This effect is called **self-inductance**
- The emf  $\varepsilon_L$  is called a **self-induced emf**

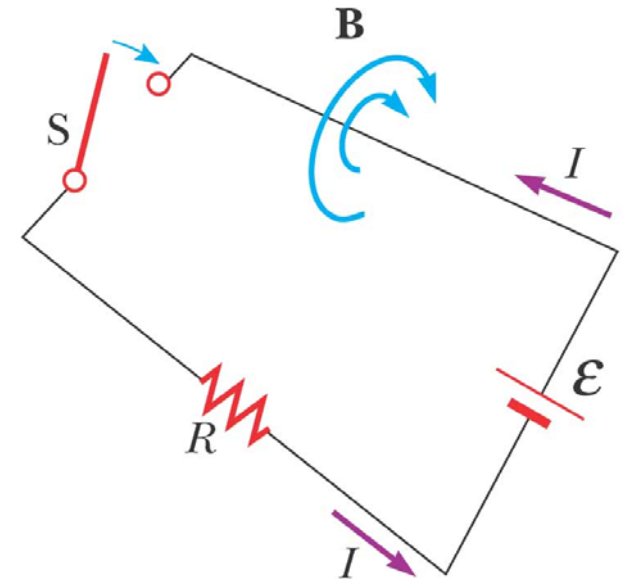


©2004 Thomson - Brooks/Cole

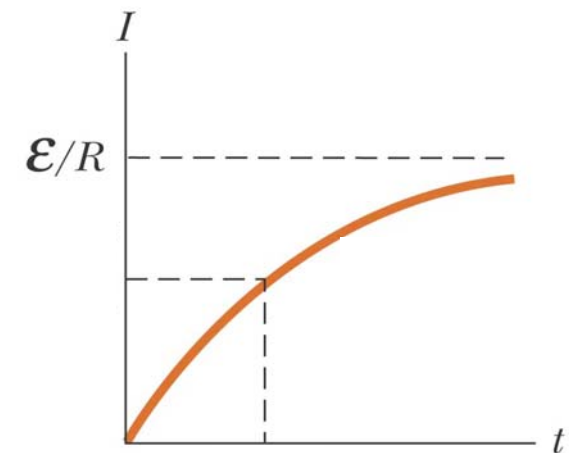

©2004 Thomson - Brooks/Cole

# Self-Inductance: Coil Example

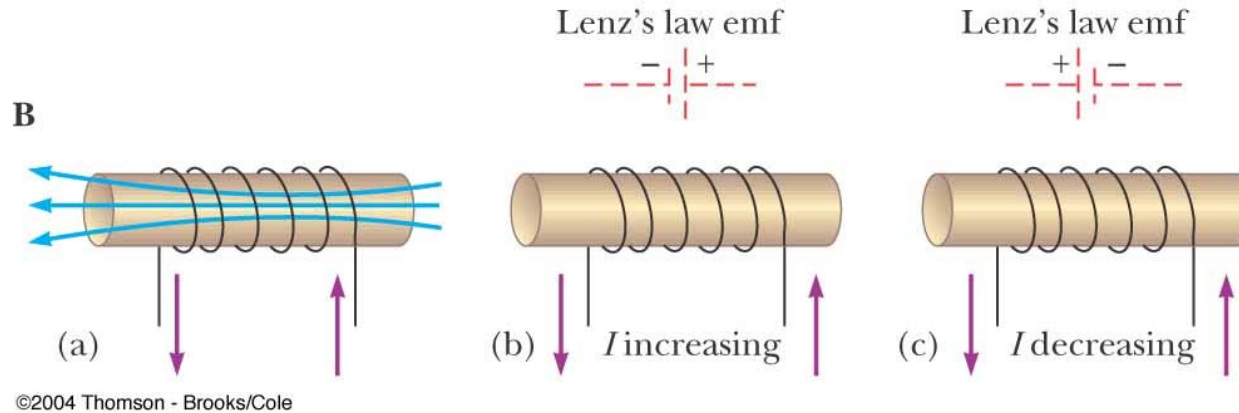

- A current in the coil produces a magnetic field directed toward the left
- If the current increases, the increasing flux creates an induced emf of the polarity shown in (b)
- The polarity of the induced emf reverses if the current decreases



# Solenoid

- Assume a uniformly wound solenoid having  $N$  turns and length  $\ell$
- The interior magnetic field is

$$B = \mu_o n I = \mu_o \frac{N}{\ell} I$$

- The magnetic flux through each turn is


$$\Phi_B = BA = \mu_o \frac{NA}{\ell} I$$

- The magnetic flux through all  $N$  turns

$$\Phi_t = N\Phi_B = \mu_o \frac{N^2 A}{\ell} I$$

- If  $I$  depends on time then self-induced emf can found from the Faraday's law

$$\varepsilon_{si} = -\frac{d\Phi_t}{dt} = -\mu_o \frac{N^2 A}{\ell} \frac{dI}{dt}$$

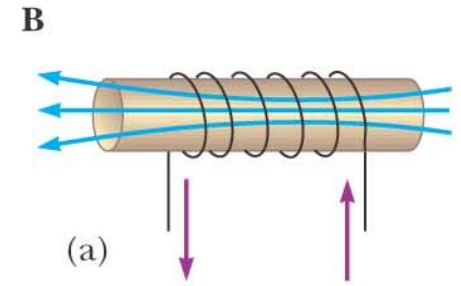


©2004 Thomson - Brooks/Cole

# Solenoid

- The magnetic flux through all  $N$  turns

$$\Phi_t = \mu_o \frac{N^2 A}{\ell} I = L I$$

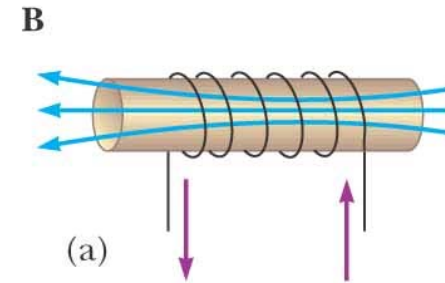

©2004 Thomson - Brooks/Cole

- Self-induced emf:

$$\varepsilon_{si} = -\frac{d\Phi_t}{dt} = -\mu_o \frac{N^2 A}{\ell} \frac{dI}{dt} = -L \frac{dI}{dt}$$

# Inductance

$$\varepsilon_L = -L \frac{dI}{dt}$$

$$\Phi = L I$$

➤  **$L$**  is a constant of proportionality called the **inductance** of the coil and it depends on the geometry of the coil and other physical characteristics

➤ The SI unit of inductance is the **henry** (H)


$$1\text{H} = 1 \frac{\text{V} \cdot \text{s}}{\text{A}}$$

Named for Joseph Henry

# Inductor


$$\varepsilon_L = -L \frac{dI}{dt}$$

$$\Phi = LI$$

- A circuit element that has a large self-inductance is called an **inductor**
- The circuit symbol is 
- We assume the self-inductance of the rest of the circuit is negligible compared to the inductor
  - However, even without a coil, a circuit will have some self-inductance

$$\Phi_1 = L_1 I$$

Flux through solenoid



$$L_1 \gg L_2$$

$$\Phi_2 = L_2 I$$

Flux through the loop



# The effect of Inductor

$$\varepsilon_L = -L \frac{dI}{dt}$$

$$\Phi = L I$$


- The inductance results in a back emf
- Therefore, the inductor in a circuit opposes changes in current in that circuit

# RL circuit

$$\varepsilon_L = -L \frac{dI}{dt}$$

$$\Phi = LI$$


- An  $RL$  circuit contains an inductor and a resistor
- When the switch is closed (at time  $t = 0$ ), the current begins to increase
- At the same time, a back emf is induced in the inductor that opposes the original increasing current

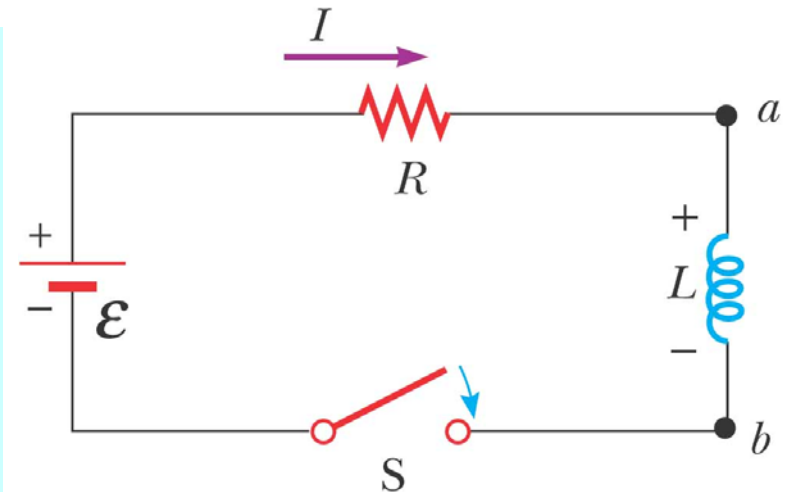

©2004 Thomson - Brooks/Cole

# RL circuit

$$\varepsilon_L = -L \frac{dI}{dt}$$

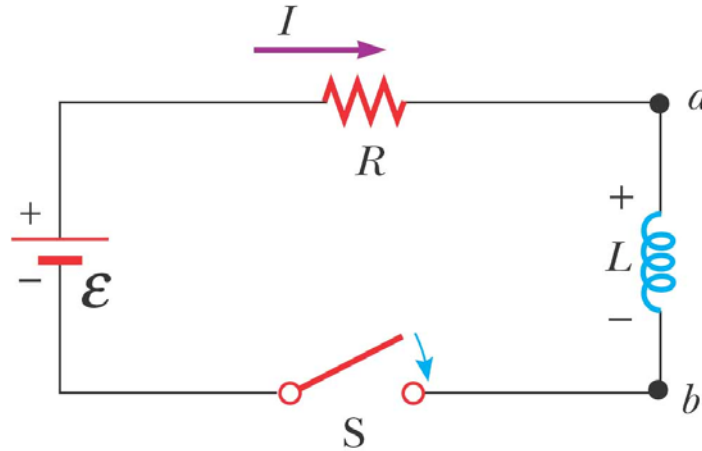

©2004 Thomson - Brooks/Cole

- Kirchhoff's loop rule:

$$\varepsilon - IR - L \frac{dI}{dt} = 0$$


- Solution of this equation:

$$I = \frac{\varepsilon}{R} (1 - e^{-Rt/L})$$

$$I = \frac{\varepsilon}{R} (1 - e^{-t/\tau})$$


where  $\tau = L/R$  - time constant

# RL circuit

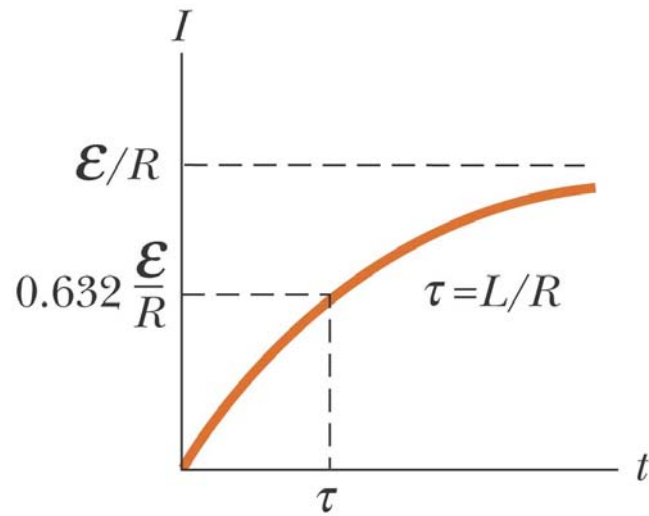

©2004 Thomson - Brooks/Cole

$$I = \frac{\mathcal{E}}{R} \left( 1 - e^{-t/\tau} \right)$$

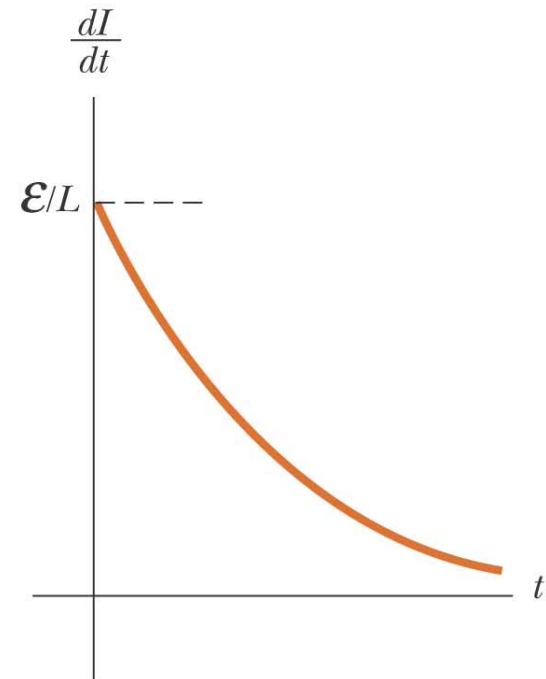

©2004 Thomson - Brooks/Cole

$$\frac{dI}{dt} = \frac{\mathcal{E}}{L} e^{-t/\tau}$$




## Energy Density of Magnetic Field

# Energy of Magnetic Field

$$\varepsilon_L = -L \frac{dI}{dt} \quad \varepsilon = IR + L \frac{dI}{dt}$$

$$I \varepsilon = I^2 R + L I \frac{dI}{dt}$$

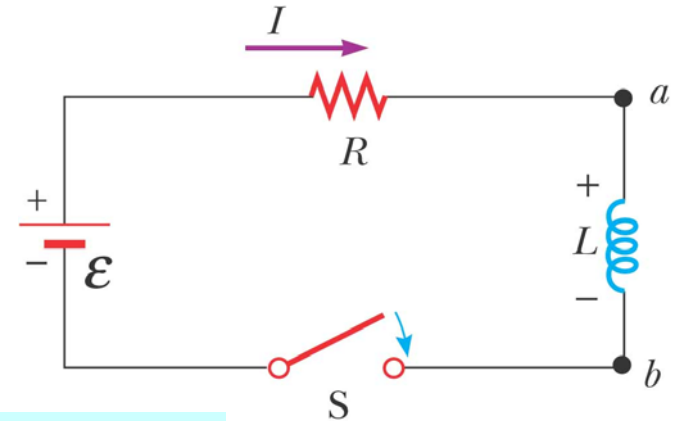

- Let  $U$  denote the energy stored in the inductor at any time
- The rate at which the energy is stored is

$$\frac{dU}{dt} = L I \frac{dI}{dt}$$

- To find the total energy, integrate and

$$U = L \int_0^I I \, dI = L \frac{I^2}{2}$$

# Energy of a Magnetic Field


- Given  $U = \frac{1}{2} L I^2$
- For Solenoid:  $L = \mu_0 n^2 A \ell$       $I = \frac{B}{\mu_0 n}$

$$U = \frac{1}{2} \mu_0 n^2 A \ell \left( \frac{B}{\mu_0 n} \right)^2 = \frac{B^2}{2\mu_0} A \ell$$

- Since  $A \ell$  is the volume of the solenoid, the magnetic energy density,  $u_B$  is

$$u_B = \frac{U}{A \ell} = \frac{B^2}{2\mu_0}$$



- This applies to any region in which a magnetic field exists (not just the solenoid)**

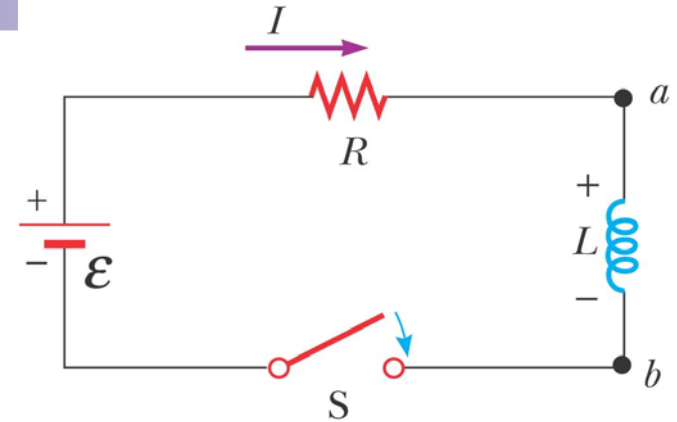

©2004 Thomson - Brooks/Cole

# Energy of Magnetic and Electric Fields

$$U_C = C \frac{Q^2}{2}$$




$$U_L = L \frac{I^2}{2}$$

## LC Circuit


# LC Circuit

- A capacitor is connected to an inductor in an LC circuit
- Assume the capacitor is initially charged and then the switch is closed
- Assume no resistance and no energy losses to radiation

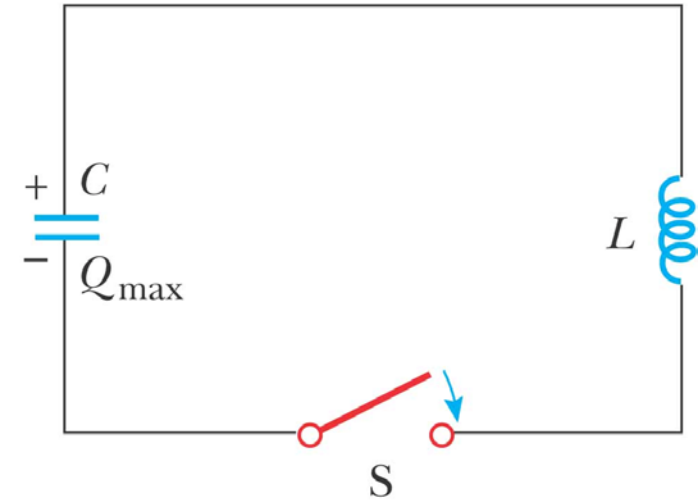


©2004 Thomson - Brooks/Cole

# LC Circuit

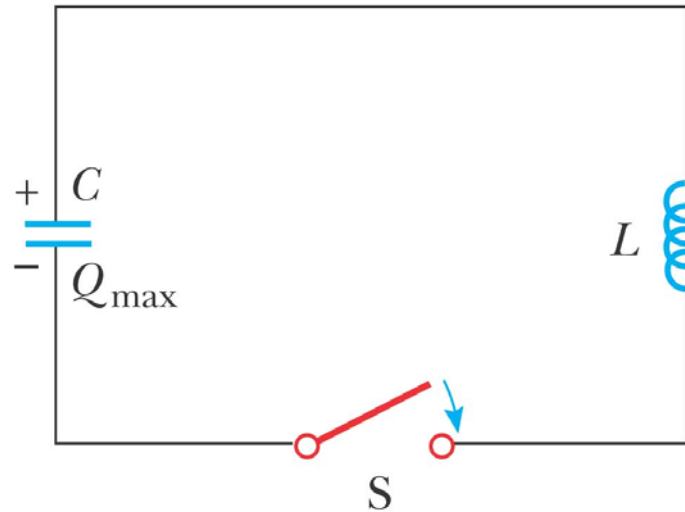

- **With zero resistance, no energy is transformed into internal energy**
- The capacitor is fully charged
  - The energy  $U$  in the circuit is stored in the electric field of the capacitor
  - The energy is equal to  $Q_{\max}^2 / 2C$
  - The current in the circuit is **zero**
  - No energy is stored in the inductor
- The switch is closed

# LC Circuit

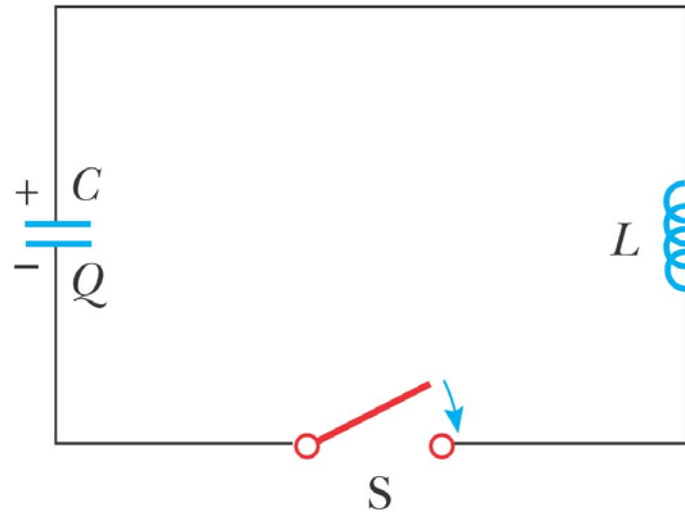


$$I = \frac{dQ}{dt}$$

- The current is equal to the rate at which the charge changes on the capacitor
  - As the capacitor discharges, the energy stored in the electric field decreases
  - Since there is now a current, some energy is stored in the magnetic field of the inductor
  - **Energy is transferred from the electric field to the magnetic field**



# LC circuit

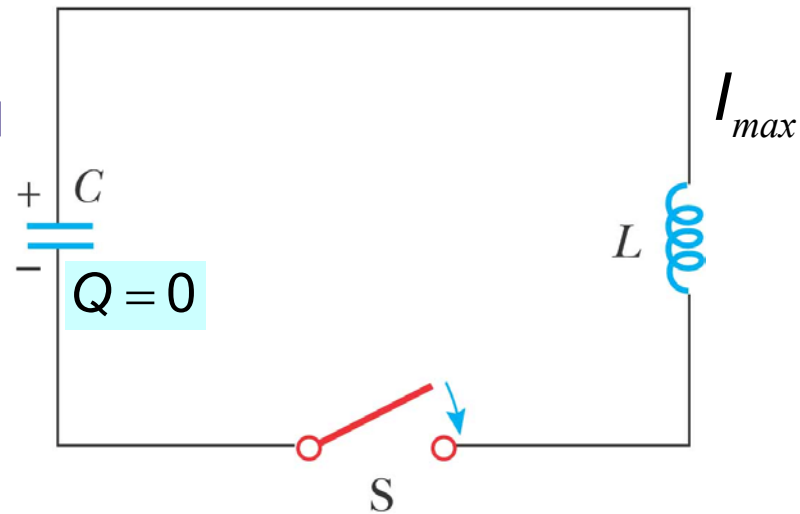


$$I = \frac{dQ}{dt}$$

©2004 Thomson - Brooks/Cole

- The capacitor becomes fully discharged
  - It stores no energy
  - All of the energy is stored in the magnetic field of the inductor
  - The current reaches its maximum value
- The current now decreases in magnitude, recharging the capacitor with its plates having opposite their initial polarity

# LC circuit

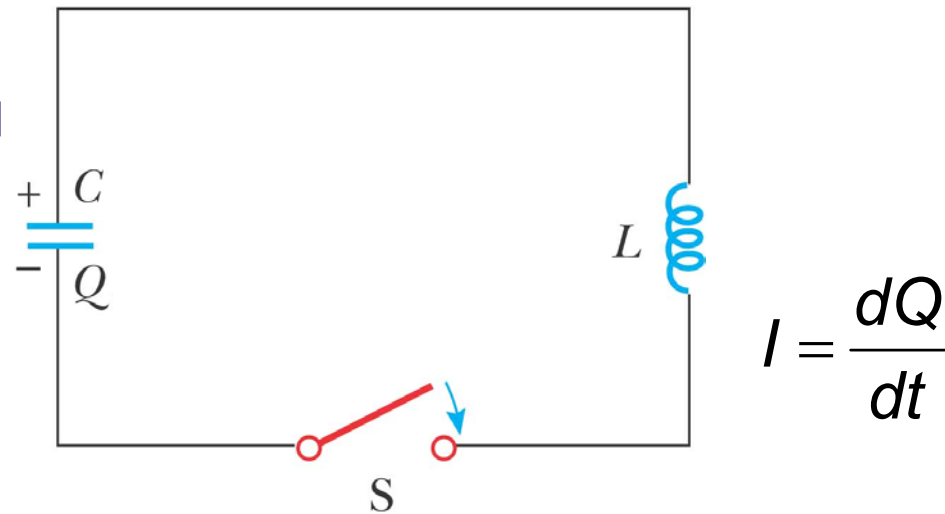

©2004 Thomson - Brooks/Cole

- Eventually the capacitor becomes fully charged and the cycle repeats
- The energy continues to oscillate between the inductor and the capacitor
- **The total energy stored in the *LC* circuit remains constant in time and equals**

$$U = U_C + U_L = \frac{Q^2}{2C} + \frac{1}{2} L I^2$$

# LC circuit


$$\frac{Q}{C} = -L \frac{dI}{dt}$$

$$\frac{Q}{C} = -L \frac{d^2Q}{dt^2}$$

Solution:  $Q = Q_{max} \cos(\omega t + \varphi)$

$$\frac{Q_{max}}{C} \cos(\omega t + \varphi) = L Q_{max} \omega^2 \cos(\omega t + \varphi)$$

$$\omega^2 = \frac{1}{LC}$$

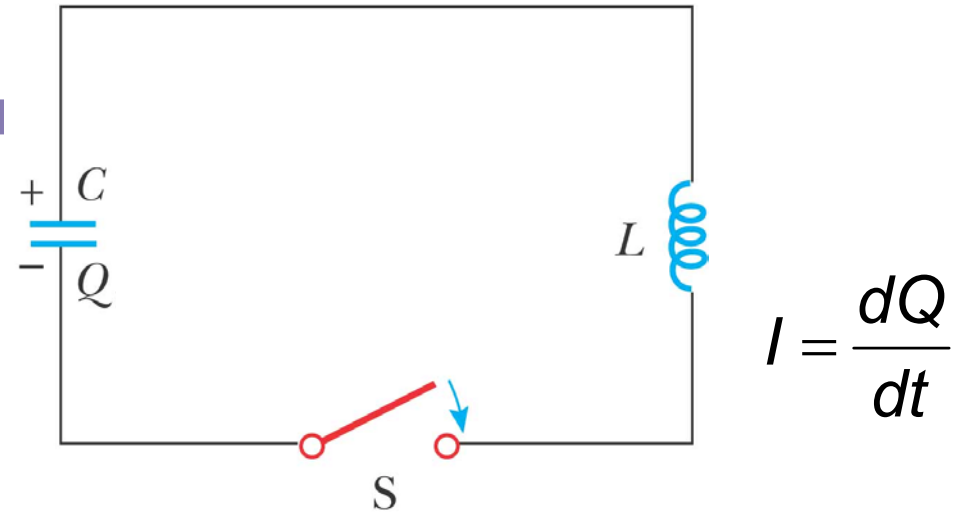


It is the *natural frequency* of oscillation of the circuit

# LC circuit

$$Q = Q_{max} \cos(\omega t + \varphi)$$

$$\omega^2 = \frac{1}{LC}$$

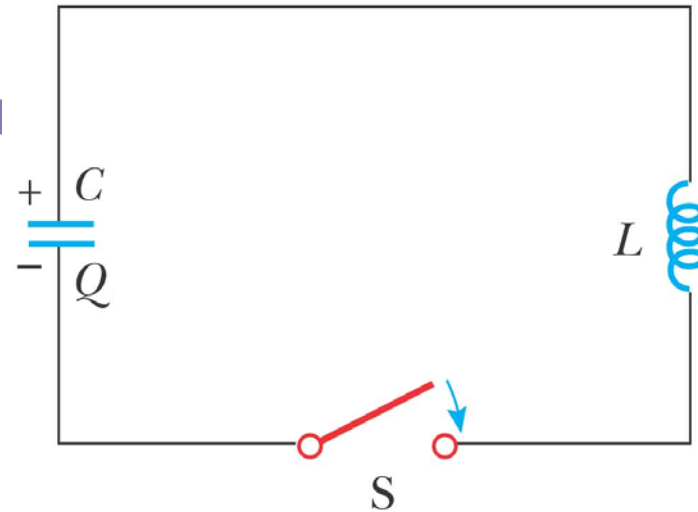

©2004 Thomson - Brooks/Cole

- The current can be expressed as a function of time

$$I = \frac{dQ}{dt} = -\omega Q_{max} \sin(\omega t + \varphi)$$

- The total energy can be expressed as a function of time

$$U = U_C + U_L = \frac{Q_{max}^2}{2C} \cos^2 \omega t + \frac{1}{2} L I_{max}^2 \sin^2 \omega t = \frac{Q_{max}^2}{2C}$$



$$\frac{Q_{max}^2}{2C} = \frac{1}{2} L I_{max}^2$$

# LC circuit

$$Q = Q_{\max} \cos(\omega t + \varphi)$$

$$I = -\omega Q_{\max} \sin(\omega t + \varphi)$$



- The charge on the capacitor oscillates between  $Q_{\max}$  and  $-Q_{\max}$
- The current in the inductor oscillates between  $I_{\max}$  and  $-I_{\max}$
- $Q$  and  $I$  are  $90^\circ$  out of phase with each other
  - So when  $Q$  is a maximum,  $I$  is zero, etc.

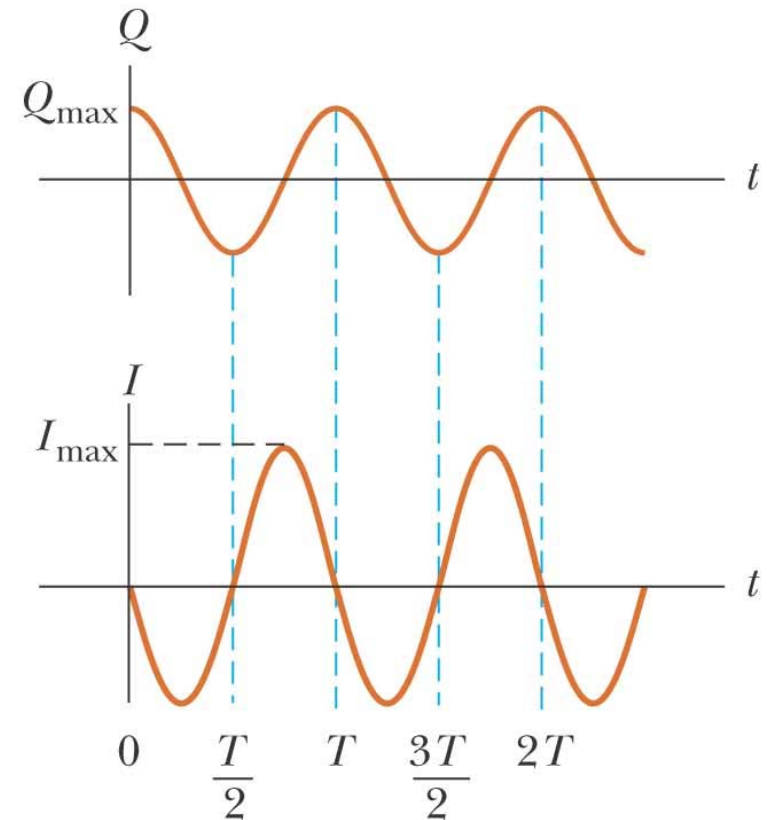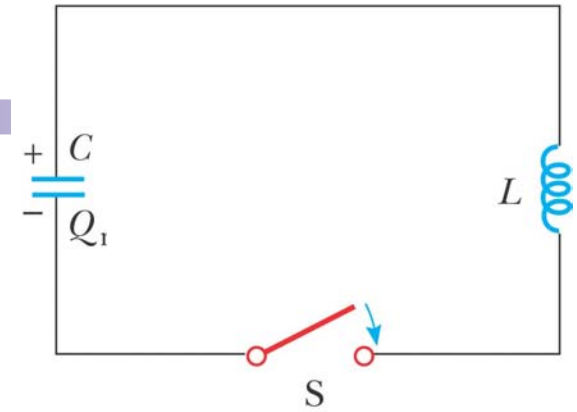

©2004 Thomson - Brooks/Cole


# LC circuit

- The energy continually oscillates between the energy stored in the electric and magnetic fields
- When the total energy is stored in one field, the energy stored in the other field is zero

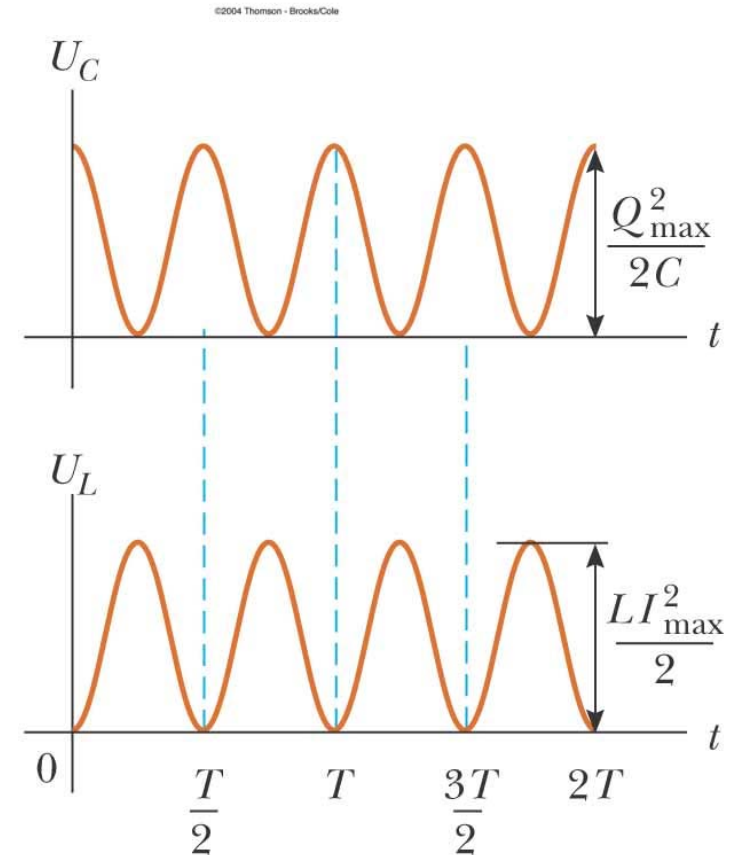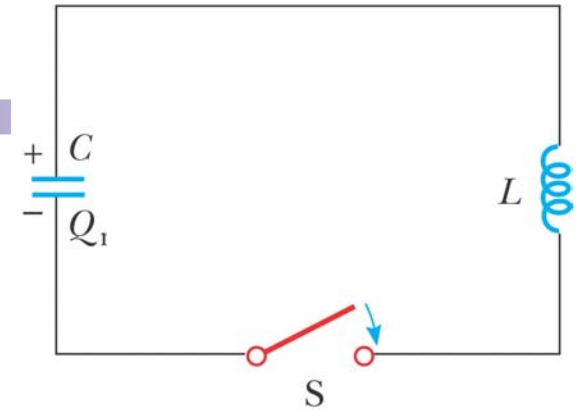


# LC circuit

- In actual circuits, there is always some resistance
- Therefore, there is some energy transformed to internal energy
- Radiation is also inevitable in this type of circuit
- The total energy in the circuit continuously decreases as a result of these processes

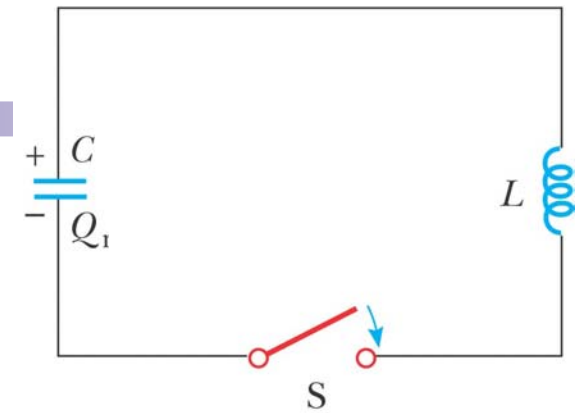

©2004 Thomson - Brooks/Cole

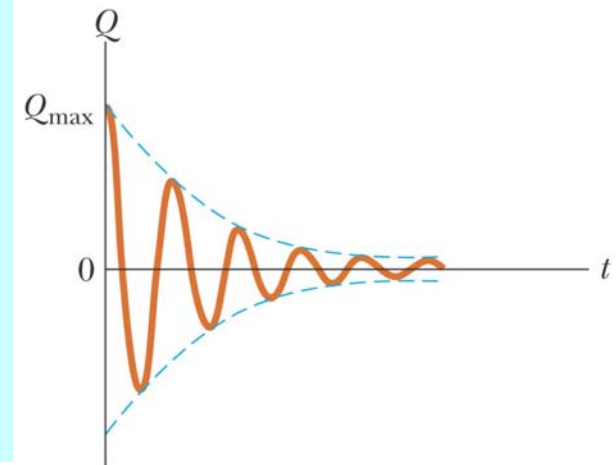

(a)

©2004 Thomson - Brooks/Cole

## Problem 2

A capacitor in a series  $LC$  circuit has an initial charge  $Q_{max}$  and is being discharged. Find, in terms of  $L$  and  $C$ , the flux through each of the  $N$  turns in the coil, when the charge on the capacitor is  $Q_{max}/2$ .

The total energy is conserved:


$$\frac{Q_{max}^2}{2C} = \frac{Q^2}{2C} + \frac{1}{2} L I^2 \quad Q = \frac{Q_{max}}{2}$$

$$\frac{1}{2} L I^2 = \frac{Q_{max}^2}{2C} - \frac{Q^2}{2C} = \frac{Q_{max}^2}{2C} - \frac{1}{4} \frac{Q_{max}^2}{2C} = \frac{3Q_{max}^2}{8C}$$

$$I = \frac{\sqrt{3}}{2\sqrt{CL}} Q_{max}$$

$$\Phi = LI = \sqrt{\frac{3L}{C}} \frac{Q_{max}}{2}$$

$$\Phi_1 = \frac{\Phi}{N} = \sqrt{\frac{3L}{C}} \frac{Q_{max}}{2N}$$

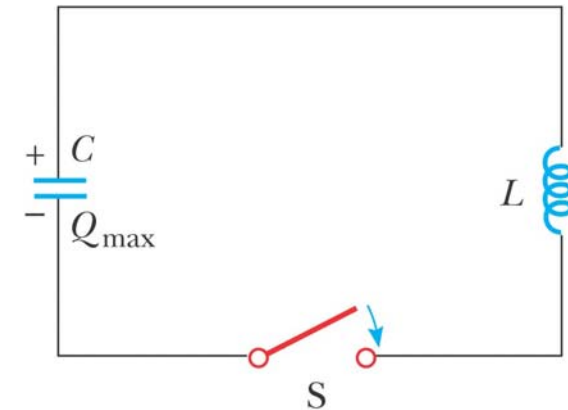

©2004 Thomson - Brooks/Cole



## Maxwell's Equations

# Maxwell's Equations

$$\oint_S \mathbf{E} \cdot d\mathbf{A} = \frac{q}{\epsilon_0} \quad \text{Gauss's law (electric)}$$

$$\oint_S \mathbf{B} \cdot d\mathbf{A} = 0 \quad \text{Gauss's law in magnetism}$$

$$\oint \mathbf{E} \cdot d\mathbf{s} = -\frac{d\Phi_B}{dt} \quad \text{Faraday's law}$$

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I + \epsilon_0 \mu_0 \frac{d\Phi_E}{dt} \quad \text{Ampere-Maxwell law}$$

## **Electromagnetic Waves**

# Maxwell Equations – Electromagnetic Waves

$$\oint \mathbf{E} \cdot d\mathbf{A} = \frac{q}{\epsilon_0} \quad \oint \mathbf{B} \cdot d\mathbf{A} = 0$$

$$\oint \mathbf{E} \cdot d\mathbf{s} = -\frac{d\Phi_B}{dt} \quad \oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I + \mu_0 \epsilon_0 \frac{d\Phi_E}{dt}$$

- Electromagnetic waves – solutions of Maxwell equations
- Empty space:  $\mathbf{q} = 0, I = 0$

$$\oint \mathbf{E} \cdot d\mathbf{A} = 0 \quad \oint \mathbf{B} \cdot d\mathbf{A} = 0$$


$$\oint \mathbf{E} \cdot d\mathbf{s} = -\frac{d\Phi_B}{dt} \quad \oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 \epsilon_0 \frac{d\Phi_E}{dt}$$

- Solution – Electromagnetic Wave

# Plane Electromagnetic Waves

- Assume EM wave that travel in x-direction
- Then Electric and Magnetic Fields are orthogonal to x
- This follows from the first two Maxwell equations

$$\oint \mathbf{E} \cdot d\mathbf{A} = 0 \quad \oint \mathbf{B} \cdot d\mathbf{A} = 0$$

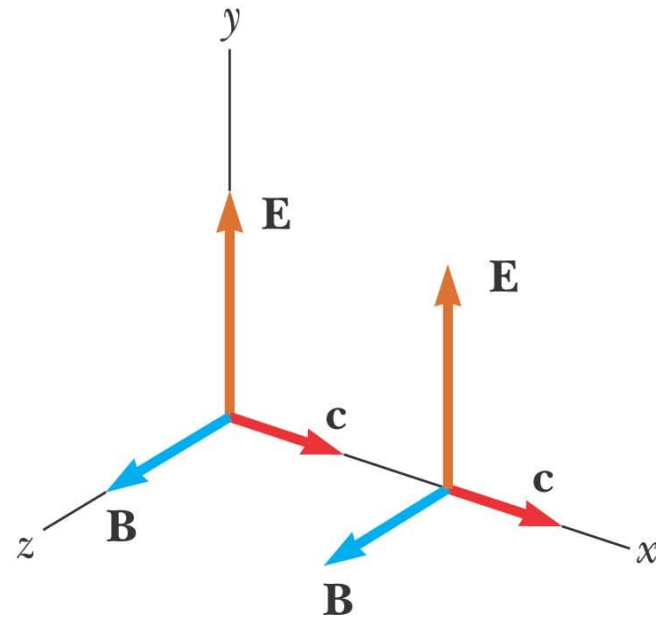

©2004 Thomson - Brooks/Cole


# Plane Electromagnetic Waves

If Electric Field and Magnetic Field depend only on  $x$  and  $t$  then the third and the forth Maxwell equations can be rewritten as

$$\oint \mathbf{E} \cdot d\mathbf{s} = -\frac{d\Phi_B}{dt} \quad \oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 \epsilon_0 \frac{d\Phi_E}{dt}$$



$$\frac{\partial^2 E}{\partial x^2} = \mu_0 \epsilon_0 \frac{\partial^2 E}{\partial t^2} \quad \text{and} \quad \frac{\partial^2 B}{\partial x^2} = \mu_0 \epsilon_0 \frac{\partial^2 B}{\partial t^2}$$

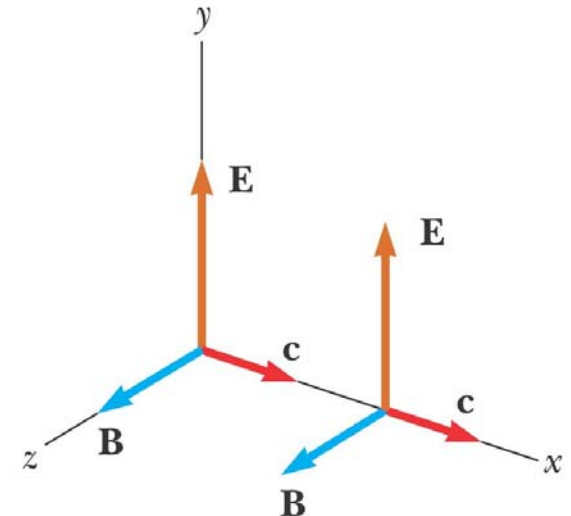

©2004 Thomson - Brooks/Cole

# Plane Electromagnetic Waves

$$\frac{\partial^2 E}{\partial x^2} = \mu_0 \epsilon_0 \frac{\partial^2 E}{\partial t^2} \quad \text{and} \quad \frac{\partial^2 B}{\partial x^2} = \mu_0 \epsilon_0 \frac{\partial^2 B}{\partial t^2}$$


Solution:

$$E = E_{max} \cos(kx - \omega t)$$

$$\frac{\partial^2 E}{\partial x^2} = -E_{max} k^2 \cos(kx - \omega t) \qquad \frac{\partial^2 E}{\partial t^2} = -E_{max} \omega^2 \cos(kx - \omega t)$$

$$E_{max} k^2 \cos(kx - \omega t) = \mu_0 \epsilon_0 E_{max} \omega^2 \cos(kx - \omega t)$$

$$k = \omega \sqrt{\mu_0 \epsilon_0}$$

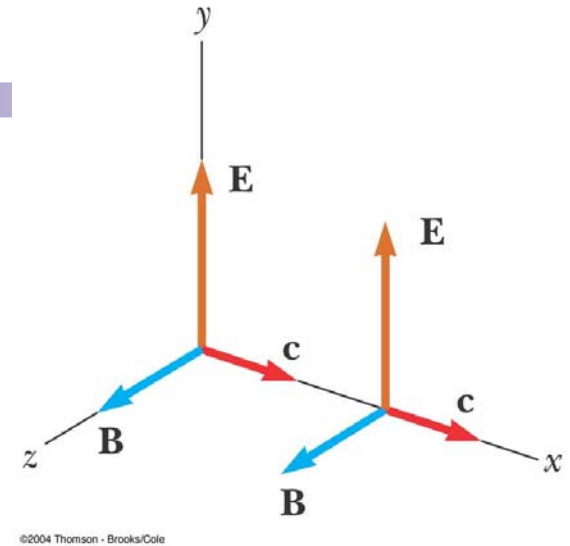

# Plane Electromagnetic Waves

$$E = E_{max} \cos(kx - \omega t)$$

$$k = \omega \sqrt{\mu_0 \epsilon_0}$$

The angular wave number is  **$k = 2\pi/\lambda$**

-  **$\lambda$**  is the wavelength


The angular frequency is  **$\omega = 2\pi f$**

-  **$f$**  is the wave frequency

$$\frac{2\pi}{\lambda} = 2\pi f \sqrt{\mu_0 \epsilon_0}$$

$$\lambda = \frac{1}{f \sqrt{\mu_0 \epsilon_0}} = \frac{c}{f}$$

$$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}} = 2.99792 \times 10^8 \text{ m/s} \quad \text{- speed of light}$$

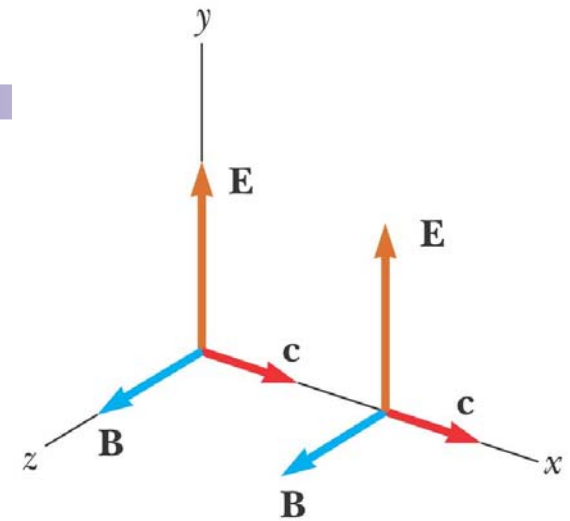

©2004 Thomson - Brooks/Cole



# Plane Electromagnetic Waves

$$E = E_{\max} \cos(kx - \omega t)$$

$$H = H_{\max} \cos(kx - \omega t)$$


$$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$$

$$\omega = ck$$


$$\lambda = \frac{c}{f}$$

$$\frac{E_{\max}}{B_{\max}} = \frac{\omega}{k} = \frac{E}{B} = c$$

**$E$**  and  **$B$**  vary sinusoidally with  **$x$**

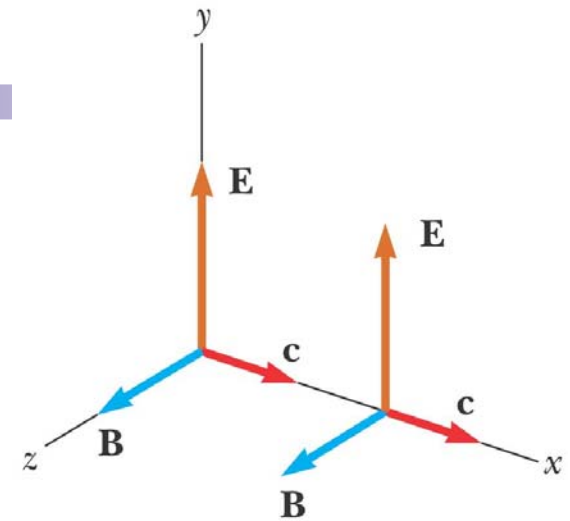


©2004 Thomson - Brooks/Cole

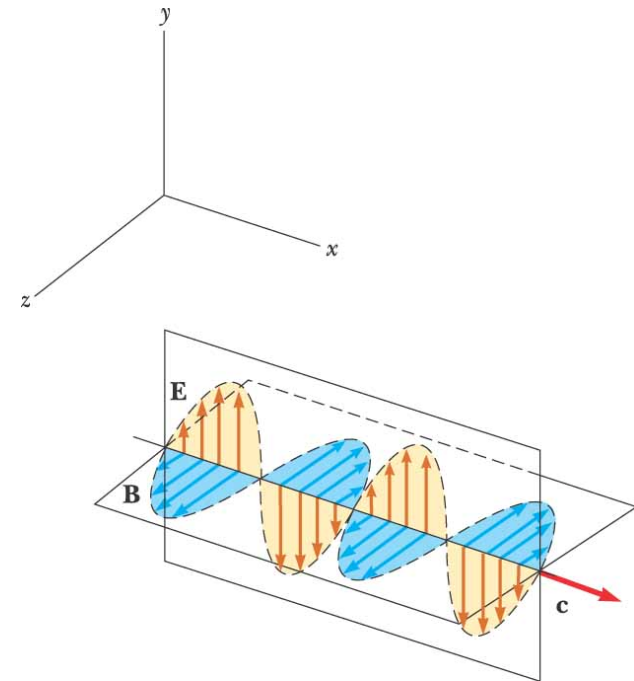

(a)

©2004 Thomson - Brooks/Cole

# Time Sequence of Electromagnetic Wave

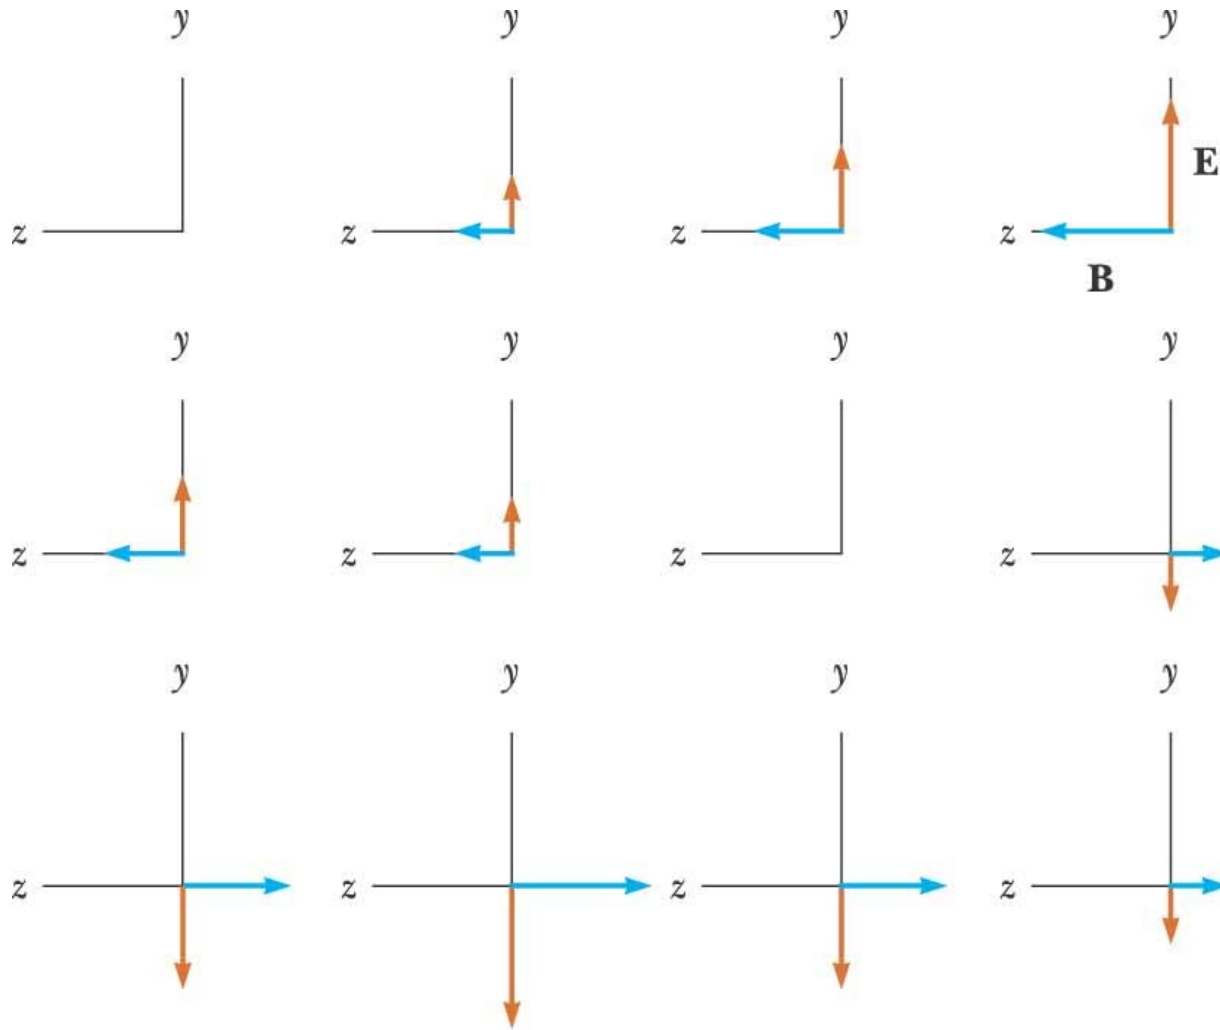

(b)


# Poynting Vector

- Electromagnetic waves carry energy
- As they propagate through space, they can transfer that energy to objects in their path
- The rate of flow of energy in an em wave is described by a vector, **S**, called the **Poynting vector**
- The Poynting vector is defined as

$$\mathbf{S} \equiv \frac{1}{\mu_0} \mathbf{E} \times \mathbf{B}$$

# Poynting Vector


- The direction of Poynting vector is the direction of propagation
- Its magnitude varies in time
- Its magnitude reaches a maximum at the same instant as **E** and **B**

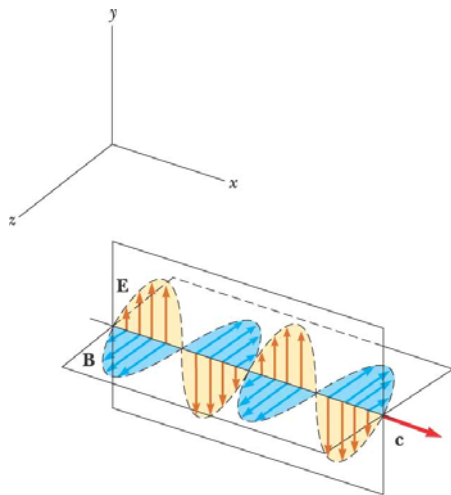

©2004 Thomson - Brooks/Cole

(a)

$$\mathbf{S} \equiv \frac{1}{\mu_0} \mathbf{E} \times \mathbf{B}$$

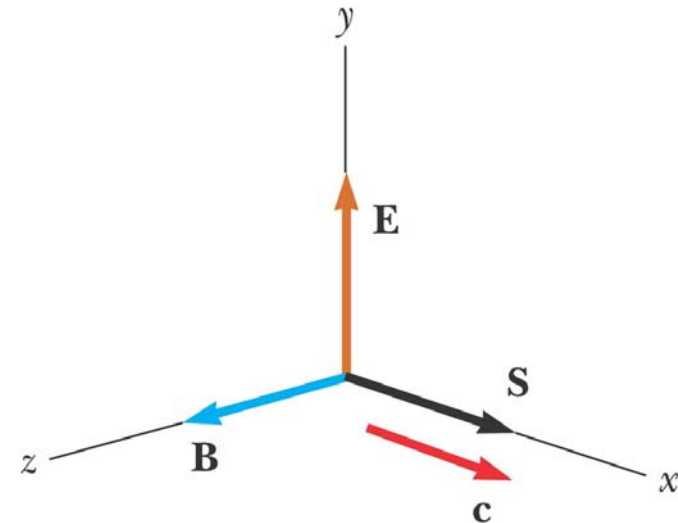


©2004 Thomson - Brooks/Cole

# Poynting Vector

- The magnitude ***S*** represents the rate at which energy flows through a unit surface area perpendicular to the direction of the wave propagation
  - This is the ***power per unit area***
- The SI units of the Poynting vector are  **$\text{J/s}\cdot\text{m}^2 = \text{W/m}^2$**

$$\mathbf{S} \equiv \frac{1}{\mu_0} \mathbf{E} \times \mathbf{B}$$

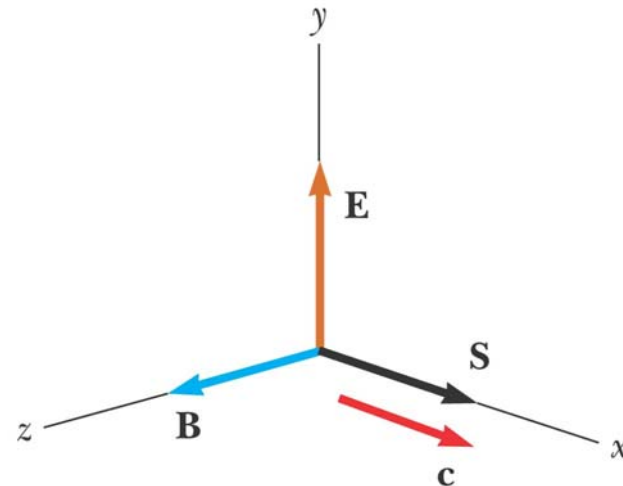

# The EM spectrum

- Note the overlap between different types of waves
- Visible light is a small portion of the spectrum
- Types are distinguished by frequency or wavelength

